

FORKARDT

FNC

*Power Chucks with
Quick Change Jaw System*



WORKHOLDING SOLUTIONS WORLDWIDE

This catalogue describes all components of the FNC universal, quick jaw change, power chucking system.

Should you require further information beyond the data contained in this catalogue, please refer to the following FORKARDT publications:

Chuck jaws

Rotating Actuating Cylinders:

OKRJ closed-centre hydraulic cylinders

Accessories for power chucks

Gripping Force Meters

SKM 1200 / 1500

Contents

FORKARDT FNC

Power Chucks

Page

Power operated chucks with wedge hook in 3-jaw configuration	3
3 FNC	4
Mounting Flanges, Adaptor Flanges, Adaptor Plates	5
Actuating cylinder Jaws and Accessories	6
Jaws and Accessories	7

• For more information visit:

www.forkardt.com

As we are constantly striving to improve our products, the dimensions and specifications in this catalogue cannot always represent the latest state of the art; they are therefore given as an indication only and are not binding.


3 FNC Power chucks

Power operated chuck with quick change jaw system in 3-jaw configuration

The FNC universally applicable power chucks belong to the most efficient and flexible chucks of the FORKARDT range of products. The unique advantage of this type is its quick change jaw system.

The frequent change-over of jaws when processing small size batches continues with this chuck to be economical, due to minimum set-up times needed.

Furthermore, sets of jaws that are already used with the proven manual chucks type F or F+ are 100 % compatible with FNC jaws.

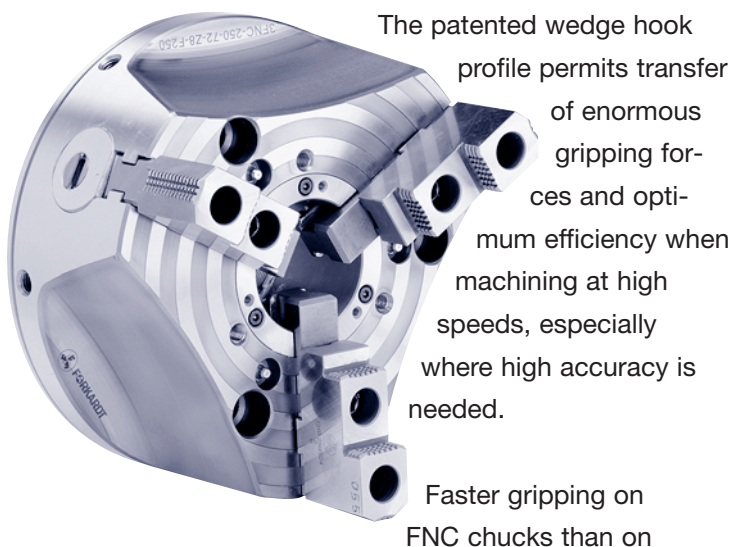

The patented wedge hook profile permits transfer of enormous gripping forces and optimum efficiency when machining at high speeds, especially where high accuracy is needed.

Faster gripping on FNC chucks than on customary quick change jaw chucks is possible due to the shorter stroke of the central actuator for the same jaw movement.

Many possibilities for mounting the FNC exist due to the modular design - thus ensuring compatibility to all common machine spindles.


And of course, all FORKARDT chucks are manufactured from highest quality materials and are produced in accordance with the requirements of ISO 9001:2000.




Technical Features:

- Optimum production efficiencies due to minimal jaw changeover times.
- Highest gripping forces and extreme accuracy.
- High grade, specially heat treated chuck body – one-piece, high strength and highly rigid construction – slim design with weight reducing cutouts.
- Mounting flanges for short taper mounting are available.
- FNC chucks may be equipped with standard jaws (hard or soft), claw jaws or special jaws.

Advantages at a glance:

- Reduction of jaw changeover time to a few seconds.
- Well proven F jaw system can also be used on FNC chucks, so many existing jaw sets can continue to be used.
- Closely maintained concentricity and repetitive accuracy as well as long service life
- Mounting accessories to suit any machine spindle.
- Extremely high gripping forces due to patented heavy duty, trapezoidal wedge hook actuation.

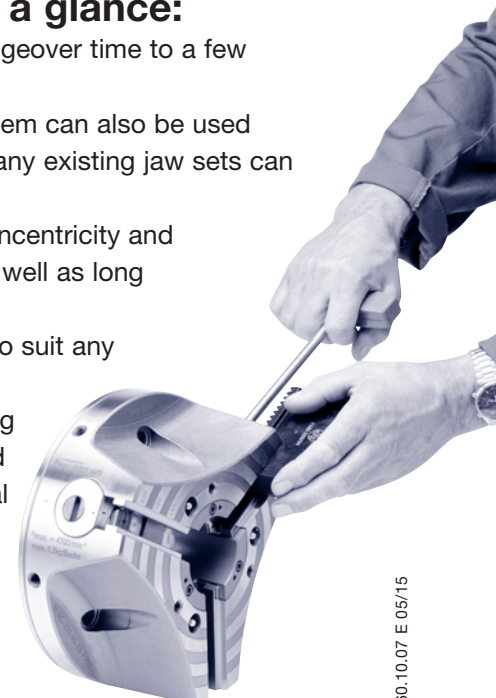

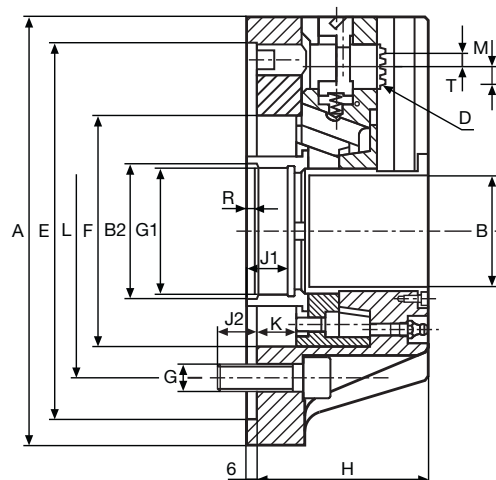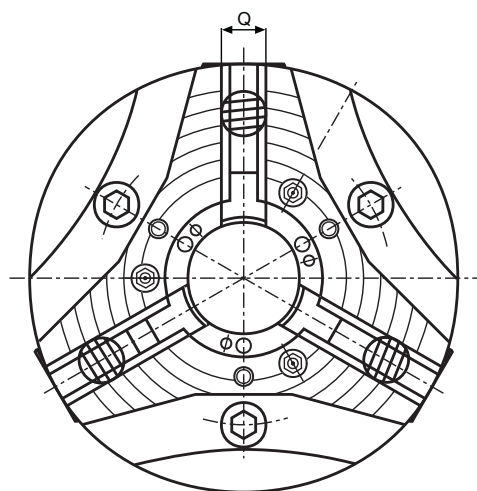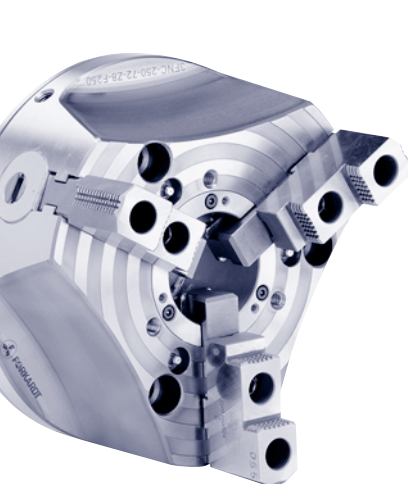

Dimensions / Performance data 3 FNC power chucks

Type	3 FNC		175-42	200-45	250-72	315-82	400-92	500-125	630-125
Dimensions									
Outer diameter	A	mm	180	206	257	315	400	500	630
Bore	B	mm	42	45	72	82	92	125	125
Chuck mounting/Mounting recess	C / E	mm	Z5 / 140	Z6 / 170	Z8 / 220	Z11 / 300	Z11 / 300	Z15 / 380	Z15 / 380
Jaw mounting	D		F 160	F 200	F 250	F 250	F 315	F 400	F 400
Pitch of serration	T		4,8	4,8	6,0	6,0	7,0	8,5	8,5
Actuator Ø	F	mm	90	106	140	150	192	230	230
Mounting bolts	G		M 10	M 12	M 16	M 20	M 20	M 24	M 24
Thread mounting	G1*)		M 50 x 2	M 52 x 2	M 80 x 2	M 92 x 2	M 100 x 2	M 135 x 2	M 135 x 2
Chuck width	H	mm	78	83	100	100	127	138	138
Thread length	J ₁	mm	22	22	28	28	28	28	28
Thread length	J ₂	mm	15	18	24	30	30	36	36
Actuator stroke	K	mm	20	20	23	23	28	33	33
Pitch circle	L	mm	104,8	133,4	171,4	235,0	235,0	330,2	330,2
Jaw stroke	M	mm	7,2	7,2	8,3	8,3	10,0	12,0	12,0
Jaw width	Q	mm	20	22	26	26	32	45	45
Mounting recess thread mounting	PH ⁷	mm	51	53	81	94	102	136	136
Width	R	mm	6	6	6	6	6	6	6
Performance data									
Max. actuating force	F _{max}	daN	3.000	4.500	6.000	6.000	10.000	12.000	12.000
Max. gripping force	F _{spmax}	daN	5.500	8.400	12.000	12.000	19.500	24.000	24.000
Max. speed	n _{max}	U / min	7.000	6.300	4.500	4.000	3.300	2.200	1.700
Max. weight top jaw	**	kg / pc.	0.22	0.34	0.74	0.74	2.24	3.6	3.6
Max. jaw height top jaw	**	mm	40	45	58	58	65	85	85
Weight	G	kg	11	15	24	37	68	115	200
Moment of inertia	J	kgm ²	0,04	0,09	0,20	0,50	1,50	4,00	11,00
Chuck constant	C1	mm	390	412	580	780	940	1200	1760
	C2	mm	213	221	290	390	482	600	880
	C3	kgm	0,065	0,09	0,187	0,33	0,73	1,66	2,80
Ident-Number									
3 FNC			D159570000	D159571000	D159427000	D159572000	D159575000	D159577000	D159578000

*) Other dimensions on request

**) Limit value for max. speed

Whereby the operating gripping force F_{sp0} at idle (at speed n = 0) is:

$$F_{sp} = \frac{C1}{C2 + a} \times Fax \pm 0,0008 \times (C3 + Ma) \times n^2 \text{ [daN]}$$

Terms used in the equation:

F_{sp} = operating gripping force [daN], the sum of the gripping forces of the jaws at operation.

C 1, C 2, C 3 = Chuck constants

Fax = Actuating force [daN]


Mounting flanges and adaptor plates:



Flanges with bayonet plate attachment for mounting on spindle J noses
to DIN 55022, DIN 55027, ISO 702 / III

Chuck type	Spindle nose	Flange type	Ident-No.	Dimensions				Studs and collar nuts		
FNC	Size			B	D	L1	L2	FN	Ident-No.	Qty.
175	4	FF140-J4	D74085000	50	18	104.8	85.0	322	D70504000	3
	5	FF140-J5	D74086000	50	24	104.8	104.8	322	D70505000	4
200	5	FF170-J5	D74089000	60	24	133.4	104.8	322	D70506000	4
	6	FF170-J6	D74090000	65	28	133.4	133.4	322	D70506000	4
250	6	FF220-J6	D74096000	80	28	171.4	133.4	322	D70506000	4
	8	FF220-J8	D74097000	80	32	171.4	171.4	322	D70507000	4
315-82	8	FF300-J8	D74103000	100	32	171.4	171.4	322	D70507000	4
400	8	FF300-J8	D74103000	90	32	235.0	171.4	322	D70507000	4
	11	FF300-J11	D74104000	90	35	235.0	235.0	322	D70508000	6
500	11	FF380-J11	D74107000	120	35	330.2	235.0	322	D70508000	6
	15	FF380-J15	D74108000	120	42	330.2	330.2	324	D70517000	6
630	11	FF380-J11	D74107000	120	35	330.2	235.0	322	D70508000	6
	15	FF380-J15	D74108000	120	42	330.2	330.2	324	D70517000	6

Order code example: 1 mounting flange type FF 170-J6, Ident. No. D1074090000; 1 set of studs with collar nuts size 6, Ident-No. D1070506000




Mounting flange J

Flanges with camlock attachment for mounting on spindle D noses
to DIN 55029, ISO 702 / II, ASA B 5.9 D1

Chuck type	Spindle nose	Flange type	Ident-No.	Dimensions				Camlock studs		
FNC	Size			B	D	L1	L2	GN	Ident-No.	Qty.
175	4	FF140-D4	D74118000	50	28	104.8	82.6	286	D70511000	3
	5	FF140-D5	D74119000	50	30	104.8	104.8	287	D70512000	6
200	5	FF170-D5	D74122000	60	30	133.4	104.8	287	D70512000	6
	6	FF170-D6	D74123000	65	35	133.4	133.4	288	D70513000	6
250	6	FF220-D6	D74129000	80	35	171.4	133.4	288	D70513000	6
	8	FF220-D8	D74130000	80	40	171.4	171.4	289	D70514000	6
315-82	6	FF300-D8	D74136000	100	35	171.4	133.4	288	D70513000	6
400	8	FF300-D8	D74136000	90	40	235.0	171.4	289	D70514000	6
	11	FF300-D11	D74137000	90	45	235.0	235.0	290	D70515000	6
500	11	FF380-D11	D74140000	120	45	330.2	235.0	290	D70516000	6
	15	FF380-D15	D74141000	120	50	330.2	330.2	291	D70516000	6
630	11	FF380-D11	D74140000	120	45	330.2	235.0	290	D70516000	6
	15	FF380-D15	D74141000	120	50	330.2	330.2	291	D70516000	6

Order code example: 1 mounting flange type FF 170-D6, Ident-No. D1074123000; 1 set of camlock studs size 6, Ident-No. D1070513000




Mounting flange D

Adaptor flanges including mounting bolts for spindle noses
to DIN 55021 A/B, DIN 55026 A/B, ISO 702/I A1/A2, ASA B5.9 A1/A2

Chuck type	Spindle nose	Flange type	Ident-No.	Dimensions				Mounting bolts		
FNC	Size			B	D	L1	L2	DIN 912 10.9		
175	4	ZWF140-K4■	D164905000	50	18	104.8	85.0	3 x M10 x 20		
	4	ZWF140-K4●	D164906000	50	18	104.8	82.6	3 x M10 x 20		
200	5	ZWF170-K5	D164907000	60	24	133.4	104.8	4 x M10 x 25		
	6	ZWF220-K6	D162896000	80	28	171.4	133.4	4 x M12 x 30		
315-82	8	ZWF300-K8	D164908000	90	32	235.0	171.4	4 x M16 x 35		
400	8	ZWF300-K8	D164908000	90	32	235.0	171.4	4 x M16 x 35		
500	11	ZWF380-K11	D164909000	120	35	330.2	235.0	6 x M20 x 40		
630	11	ZWF380-K11	D164909000	120	35	330.2	235.0	6 x M20 x 40		

■ DIN 55021 pitch circle diameter 85 mm ● DIN 55026 pitch circle diameter 82.6 mm

Order code example: 1 adaptor flange ZWF140-K4, Ident-No. D44757000




Adaptor flange ZWF

Adaptor plates for spindle noses
to DIN 55021 A, DIN 55026 A, ISO 702/I A2, ASA B 5.9

Chuck type	Spindle nose	Flange type	Ident-No.	Dimensions		
FNC	Size			D	L2	L*
175	5	ZWS140-K5	D159570K05	14	104.8	10
200	6	ZWS170-K6	D159571K06	15	133.4	15
250	8	ZWS220-K8	D159427K08	17	171.4	15
315	8	ZWS300-K11	D159572K11	17	171.4	15
400	11	ZWS300-K11	D159574K11	19	235.0	20
500	15	ZWS380-K15	D159577K15	21	330.2	20
630	15	ZWS380-K15	D159578K15	21	330.2	20

* The length of the chuck mounting bolts must be increased by the amount "L" when using these adaptor plates!

Order code example: 1 adaptor plate ZWS140-K5, Ident-No. D1074035000




Adaptor plate ZWS

Actuating cylinders

Other FORKARDT accessories available include:


- Draw tubes and bars, cylinder flanges (machine - related)
- Hard and soft top standard – jaws
- Roughing jaws
- Special grease keeping the clamping force
- Lapping plates for the maintenance of fine serration of chuck jaws.
- Special chuck jaws (work piece – related)
- Highly precise oil feed and coolant drainage systems
- Balanced to class Q = 2.5
- Alternate controlled safety of non-return valves
- Clamping stroke monitoring included as standard
- Continuous clamping stroke monitoring as option
- Developed and produced under ISO 9001:2000

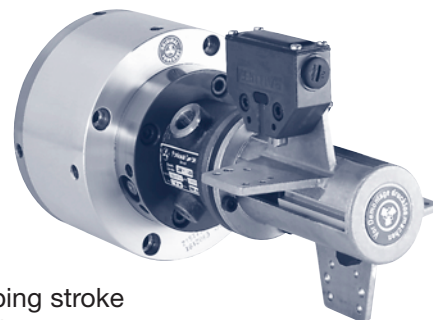

Gripping force meters
SKM 1200 / 1500

Chuck jaws

Power Chucks of the FNC series are delivered with the jaws of your choice:

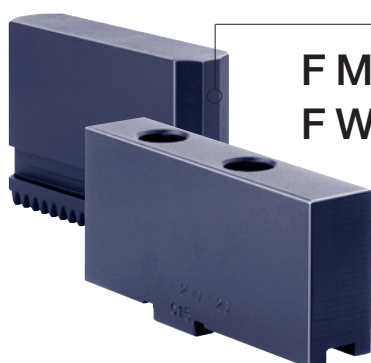

FMB
FWB

Soft top jaws




Soft jaws (type FMB / FWB) are used for the accurate clamping of already machined work pieces, on which clamping surfaces should not be damaged. These jaws are turned, by the user, under clamping pressure, to the respective clamping diameter to ensure extremely high accuracy and repeatability.






KBKTNC

Roughing jaws

For heavy duty machining of overhanging work pieces roughing jaws KBKTNC with replaceable chucking claws SKA (for external clamping) and SKI (for internal clamping) are available. The chucking claws provide safest gripping even on short clamp surfaces.

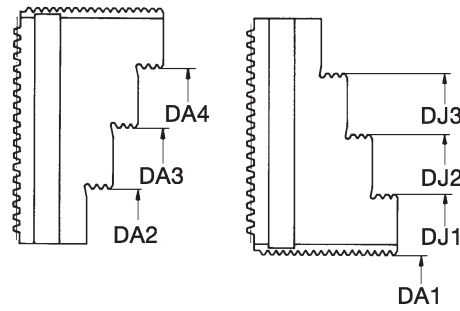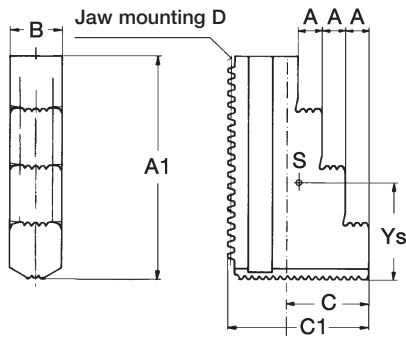
FSTB


Chuck type	Max. swing diameter	Jaw type	Nominal dimensions				Ident.-No.	a1	a2	a3	a4	c1	For external chucking				For internal chucking			Distance to gravity center Ys	Weight kg/each
UKFST			A	B	C	D							DA1	DA2	DA3	DA4	DJ1	DJ2	DJ3		
175 - 42	234	160	7.5	20	24	F160	D1070016633	79	23	43	63	45	8-65	59-108	99-148	138-188	63-112	102-152	142-192	35.5	0.350
200 - 45	273	200	10	22	35	F200	D1070021633	94	24	48	72	60	8-76	69-128	116-176	164-224	65-124	113-173	160-220	41.0	0.615
250 - 65	346	250	14	26	40	F250	D1070026533	115	39.7	-	79.9	70	10-101	96-181	-	175-261	96-182	-	176-262	53.0	1.090
250 - 72													10-137	96-217	-	175-297	96-218	-	176-298		
315 - 65													10-137	96-217	-	175-297	96-218	-	176-298		
315 - 82													10-137	96-217	-	175-297	96-218	-	176-298		
400 - 85	462	315	15	32	46	F315	D1070033533	129	37.5	-	92.8	81	40-202	106-276	-	216-386	109-278	-	218-388	59.0	1.770
400 - 92													40-236	150-357	-	272-480	152-367	-	274-480		
500 - 125	586	400	20	45	52	F400	D1070038533	167	52.5	-	113.8	93	40-236	150-357	-	272-480	152-367	-	274-480	75.5	3.600
630 - 125	690												110-339	150-459	-	272-582	152-460	-	274-582		

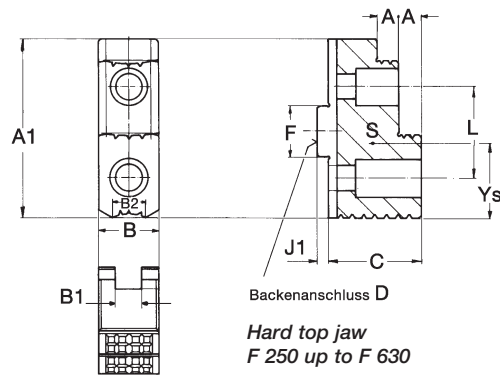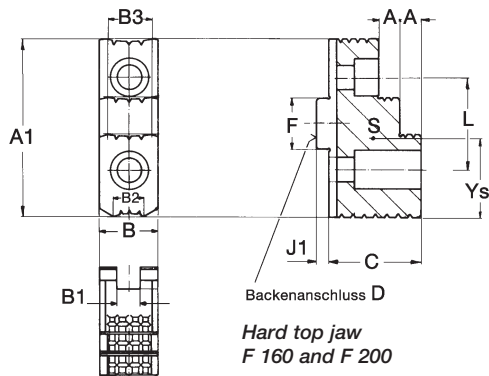
FGB/FHB


Chuck type	Max. swing diameter	Jaw type	Nominal dimensions				Ident.-No.		a1	a2	a3	c1	For external chucking				For internal chucking			Distance to gravity center Ys	Weight kg/each
			A	B	C	D	Base jaw	Top jaw					DA1	DA2	DA3	DA4	DJ1	DJ2	DJ3		
175 - 42	234	160	7.5	30	38.5	F160	D70016504	D1070016624	67	33.1	46.2	59.5	8-65	59-108	99-148	138-188	63-112	102-152	142-192	33.9	0.217
200 - 45	273	200	10	30	45	F200	D70021504	D1070021624	75	33.7	47.8	70	8-76	69-128	116-176	164-224	65-124	113-173	160-220	40.3	0.340
250 - 65	346	250	14	32	57	F250	D70026404	D1070026524	90	40.4	80.6	90.5	10-101	96-181	-	175-261	96-182	-	176-262	48.5	0.740
250 - 72													10-137	96-217	-	175-297	96-218	-	176-298		
315 - 65													10-137	96-217	-	175-297	96-218	-	176-298		
315 - 82													10-137	96-217	-	175-297	96-218	-	176-298		
400 - 85	462	315	15	36	64	F315	D70033404	D1070033524	106	37.0	91.3	99	40-202	106-276	-	216-386	109-278	-	218-388	55.3	2.240
400 - 92													40-236	150-357	-	272-480	152-367	-	274-480		
500 - 125	586	400	20	45	85	F400	D70038404	D1070038524					40-236	150-357	-	272-480	152-367	-	274-480	75.5	3.600
630 - 125	686												110-339	150-459	-	272-582	152-460	-	274-582		



*Unique
First-class
Experienced.*

FORKARDT LOCATIONS

FORKARDT DEUTSCHLAND GmbH

Lachenhauweg 12
72766 Reutlingen-Mittelstadt
Phone: (+49) 7127 5812 0
Email: info@forkardt.com

FORKARDT USA

2155 Traversefield Drive Traverse City,
MI 49686, USA Phone: (+1) 800 544-3823
(+1) 231 995-8300
Fax: (+1) 231 995-8361
Email: sales@forkardt.us

FORKARDT INDIA LLP Plot No. 39

D.No.5-5-35 Ayyanna Ind. Park
IE Prasanthnagar, Kukatpally
Hyderabad - 500 072, India Phone: (+91) 40
400 20571
Fax: (+91) 40 400 20576
Email info@forkardtindia.com

FORKARDT FRANCE S.A.R.L.

28 Avenue de Bobigny
F-93135 Noisy le Sec Cédex
Phone: (+33) 1. 4183 1240
Fax: (+33) 1 4840 4759
Email: forkardt.france@forkardt.com

FORKARDT CHINA

Precision Machinery (Shanghai) Co Ltd
1F, #45 Building, No. 209 Taigu Road,
Waigaoqiao FTZ CHINA 200131, CHINA
Phone: (+86) 21 5868 3677
Email: info@forkardt.cn.com

WWW.FORKARDT.COM